



R. J. CONSANI (PTY) LTD


SPECIALISED MECHANICAL ENGINEERING

TEL: (021) 945 4261
info@consani.co.za

FAX: (021) 948 1929
www.consani.co.za

PO BOX 282
BELLVILLE 7535
SOUTH AFRICA
7 ELECTRON STREET
TRIANGLE FARM
BELLVILLE
Reg. No. 73/16680/07
VAT No. 4270114418

CONSANI ROOF TILE GRAB SPECIFICATIONS

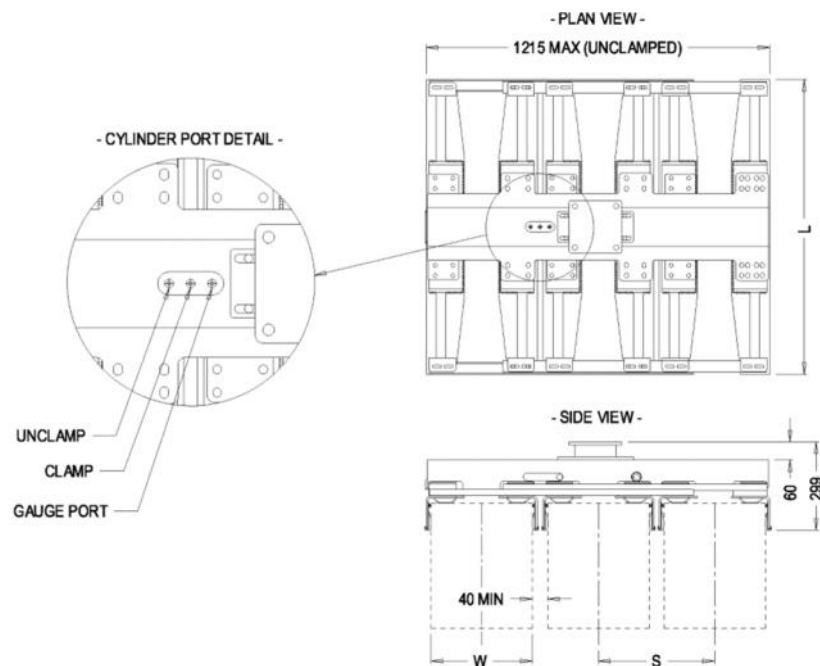

Model	Unit	Model TG 13-1000	Model TG 13-1150
Capacity - Maximum Load	kg	600	700
Length of Grips - L	mm	1000	1150
Tile Width - W	mm	310 to 380	310 to 380
Centre Line Spacing * - S	mm	395 to 405	395 to 405
Operating Pressure	MPa	11 to 20	13 to 20
Cylinder Ports	BSP	3 x ¼ " Parallel	3 x ¼ " Parallel
Cylinder Stroke	mm	115	115
Cylinder swept volume	ml	240	240
Approximate Weight (Tare)	kg	204	214
Shipping Size (uncrated)	cm	119 x 100 x 30	119 x 115 x 30

* Pre-set to 400mm at the factory unless otherwise requested at time of purchase.

- The mounting bracket is designed to accept a manual or hydraulic rotator, the mounting of which is with 4 only M16 bolts set on a 140mm centre to centre.
- Recommended hydraulic oil is *Engen Gencirc 32* or equivalent.



Directors: R. J. Consani (P.Eng.Int.); P. D. Consani (NHD Mech.Eng.)

